

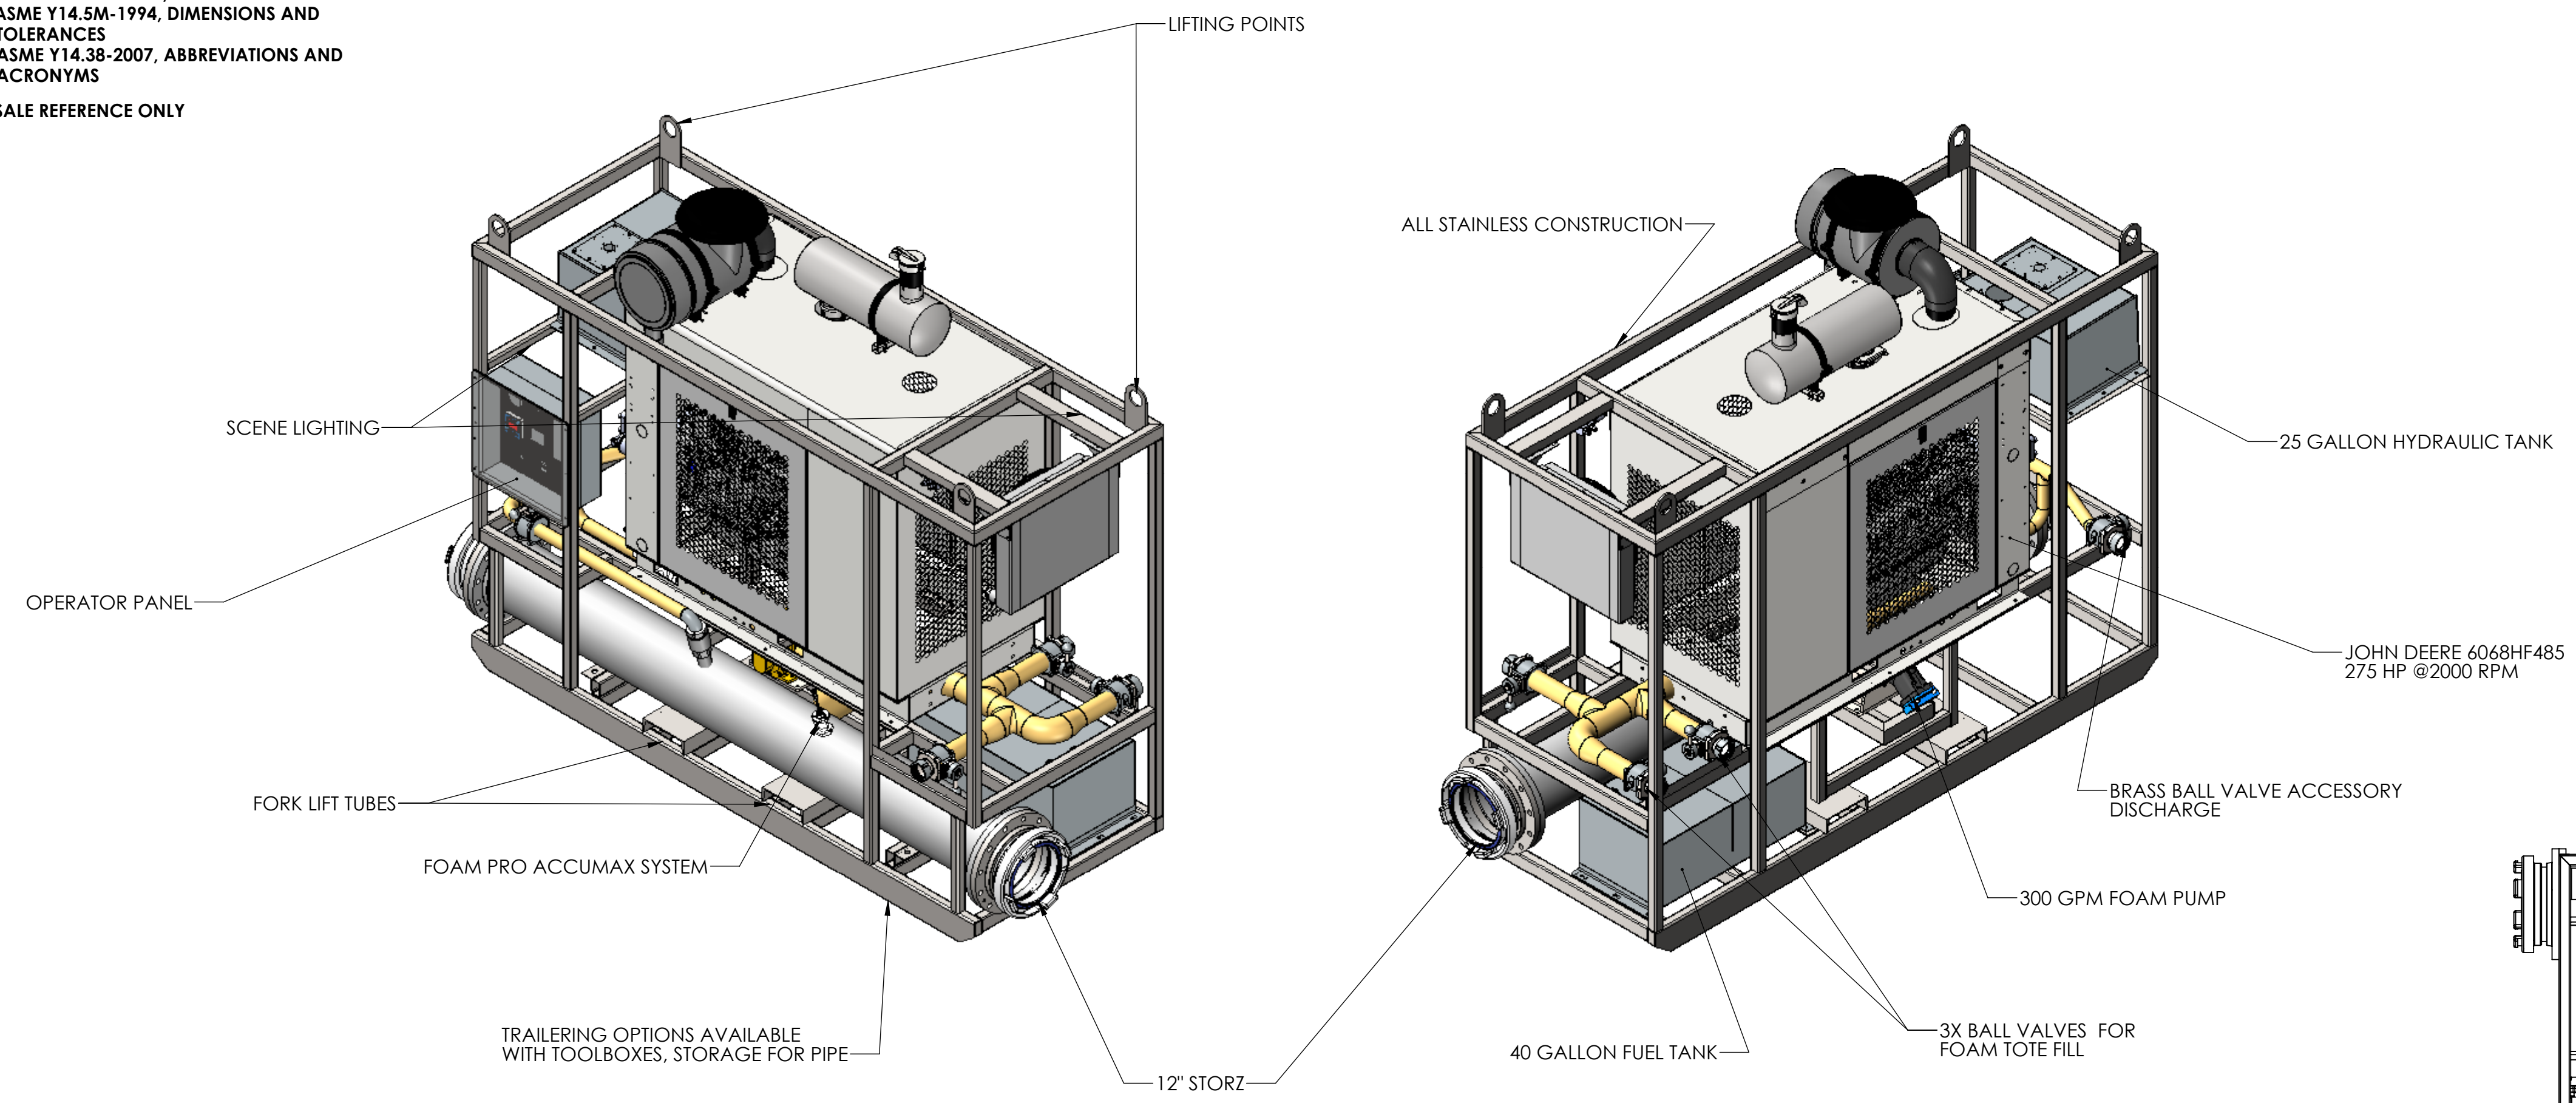
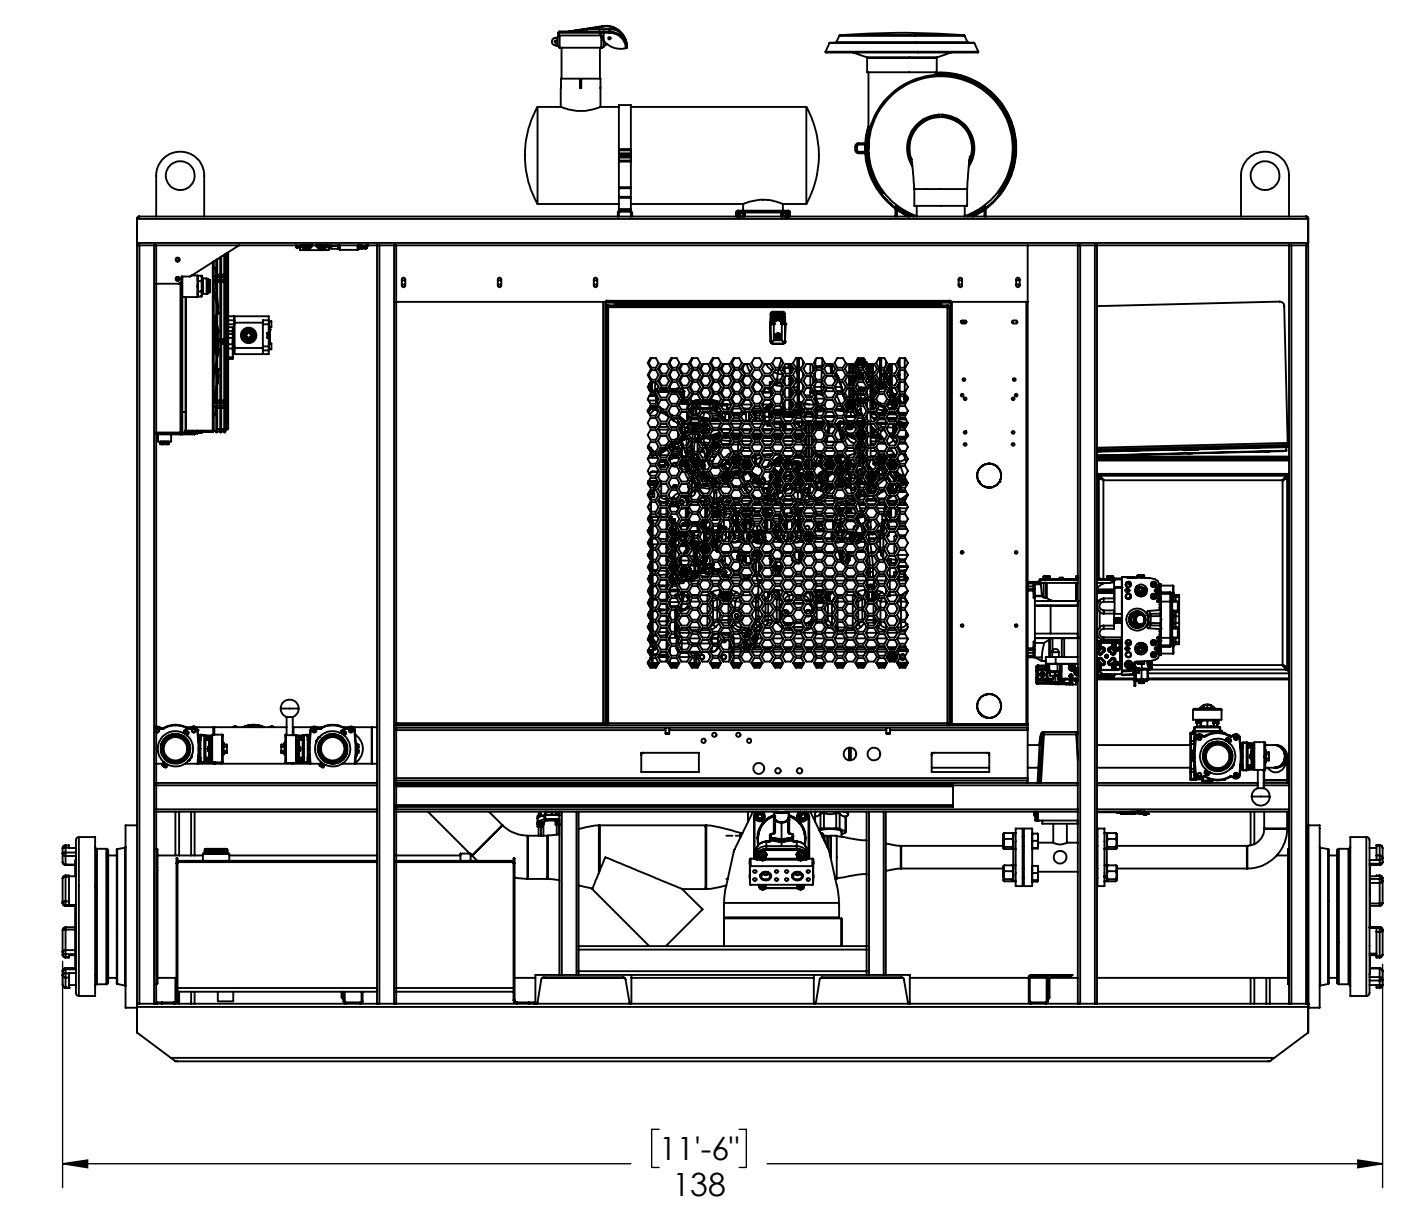
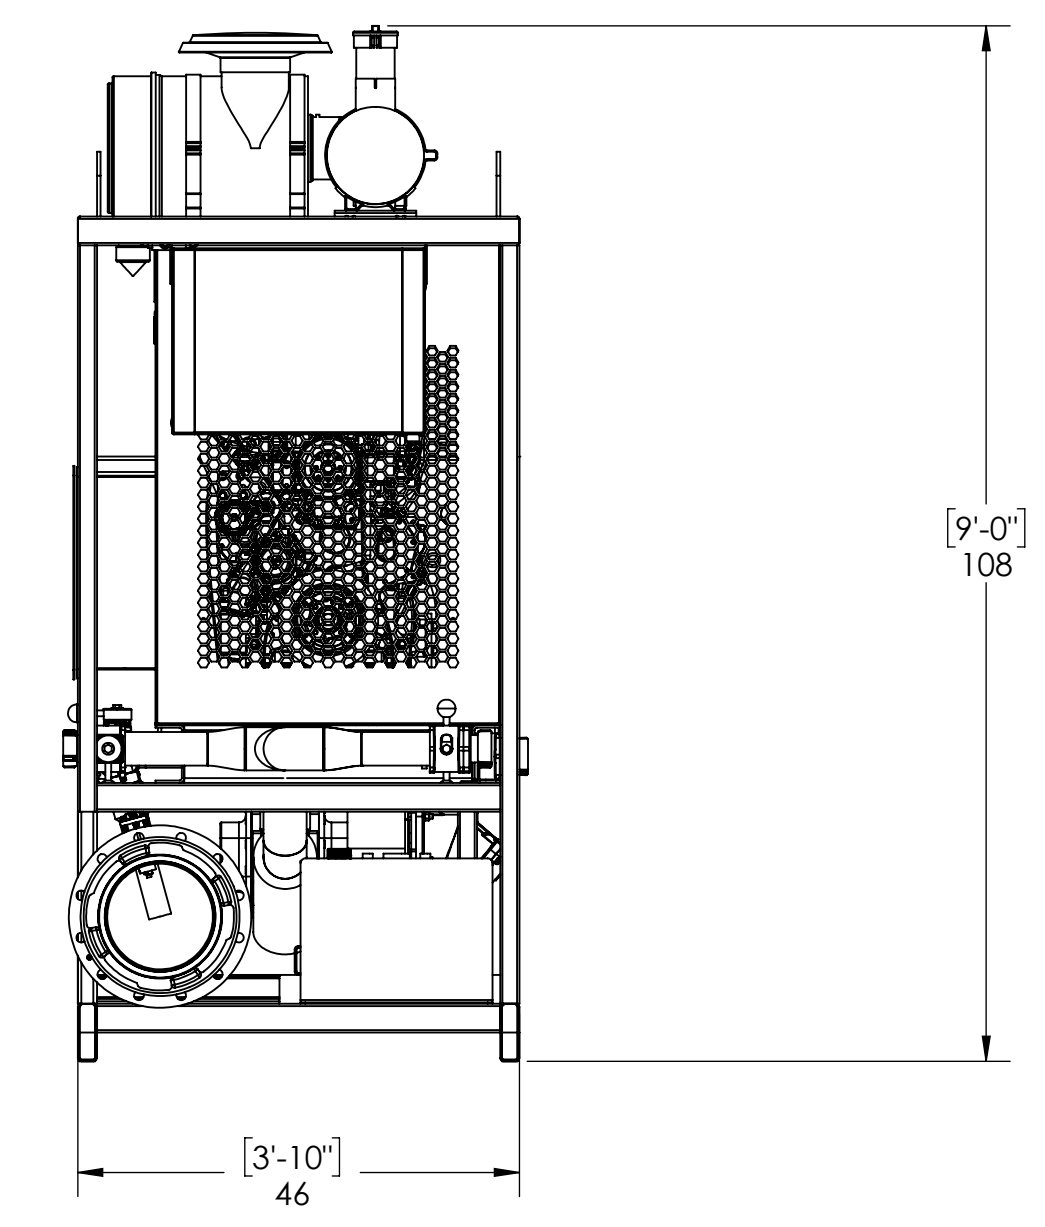


NOTES:

1. APPLICABLE STANDARDS/SPECIFICATIONS
 - A. ASME Y14.5M-1994, DIMENSIONS AND TOLERANCES
 - B. ASME Y14.38-2007, ABBREVIATIONS AND ACRONYMS
2. FOR SALE REFERENCE ONLY

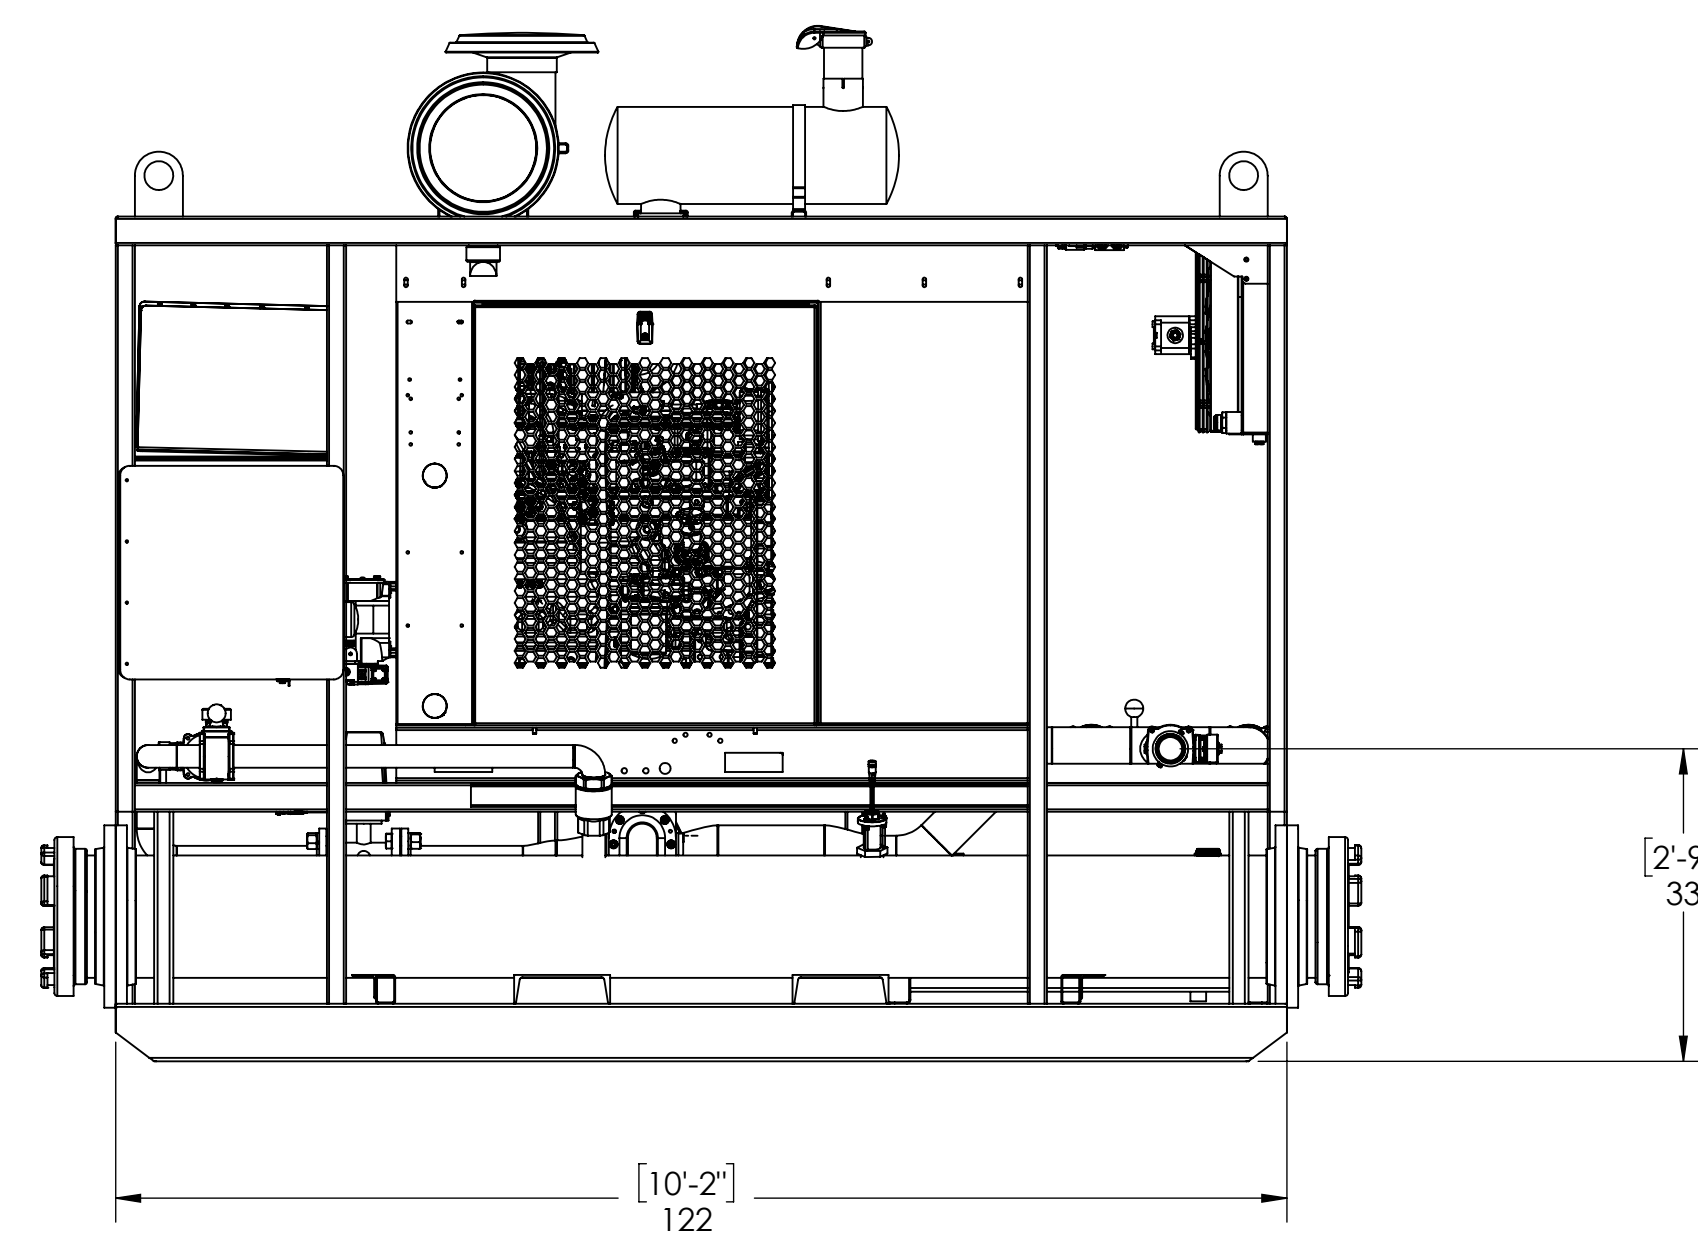

FOAM PRO ACCUMAX 3300 SINGLE POINT SYSTEM
 FOAM DISCHARGE 12.0 GPM (45 LPM) - 300 GPM (1,136 LPM)
 1% CONCENTRATION FLOW 30,000 GPM (113,356 LPM)
 3% CONCENTRATION FLOW 10,000 GPM (37,854 LPM)
 6% CONCENTRATION FLOW 5,000 GPM (18,927 LPM)

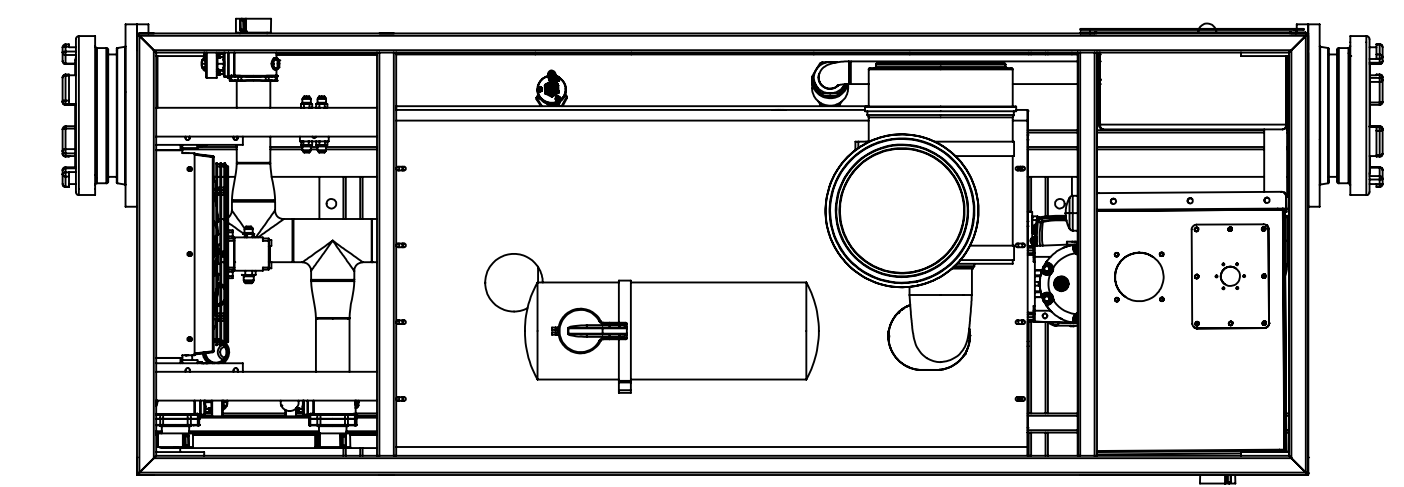

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMINATION OR DISCLOSURE, IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUBMITTED, EXCEPT AS AUTHORIZED IN WRITING BY US FIRE PUMP.

DELIVERY MUST CONFORM EXACTLY WITH DRAWING SPECIFICATIONS AND APPROVED Q.A. SAMPLES. ABSOLUTELY NO CHANGES ARE PERMITTED WITHOUT PRIOR APPROVAL BY US FIRE PUMP. THIS INCLUDES CHANGES TO: SOFTWARE, MATERIALS, INTERNAL COMPONENTS, MANUFACTURING PROCESSES.

INCH

ADDITIONAL APPROVALS	DATE					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS: .XX ± 0.02 XXX ± 0.010 SHEET METAL DIMENSIONS: ± 0.005 DO NOT SCALE DRAWING	PROJECT		<p>300 GPM DIRECT FOAM INJECTION SKID</p>										
STRESS							APPROVALS	DATE											
MATERIALS & PROCESSES							DRAWN	CJG		29 JUN 21									
QUALITY ASSURANCE							CHECKED	JJS		29 JUN 21									
MANUFACTURING ENGINEERING		DASH NO.	NEXT ASSY	USED ON		DESIGNER	REN	29 JUN 21	SIZE	D	CAGE CODE	-	DWG NO	Assembly-DFIS_4	REV	-			
TREATMENT		APPLICATION			PROJECTION	THIRD ANGLE	APPROVED	JJS	29 JUN 21	SCALE	1:20	RELEASE DATE	-	WEIGHT	5849.45	UNITS	lbs	SHEET	1 of 1